

■ TECHNICAL SPECIFICATIONS

- PRODUCT L1
- DISPLAY Analogue
- MOVEMENT Swiss Part Ronda 505.24H
- CASING MATERIAL Sand blasted 316 stainless steel
- MEASUREMENT Diameter 40mm x thickness 8mm (casing)
- WATER RESISTANCE 5 ATM
- BATTERY 371 /1.55V
- STRAP Leather

loytowatches.com

L1
LOYTO

H E L L O
S T R A N G E R


■ LOYTO WATCHES MANIFESTO

Our inspiration? Observation. We didn't have to go far... an old watch, take it apart, look at it from the outside and understand it on the inside.

Something told us that it still had so much more to give. We wanted to create something new while respecting its analogue spirit.

And we had fun.

■ HOW IT WORKS?

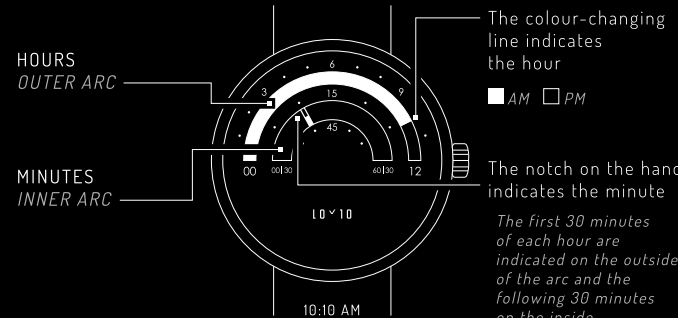

■ HOW TO SET THE TIME


Before setting the time on the watch, bear in mind that the crown has three positions:

- POSITION 0_ Position in which the watch runs normally.
- POSITION 1_ Pull the crown until you hear the first click. In this position, you will be able to turn the hour hand.
- POSITION 2_ Pull the crown until you hear a second click. In this position, you will be able to turn the hour and the minute hand.



STEP 1_


- Put the crown in position 2.
- Turn the crown until the minute hand indicates 00 at the left end of the minute arc and 60 at the right end.

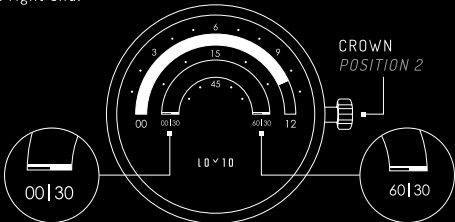

STEP 2_

- Put the crown in position 1.
- Turn the crown until the hour hand indicates the exact hour. White indicates AM hours and black indicates PM hours.


For example, in this diagram we want to set the watch at 6 PM.



STEP 3_

- Put the crown again in position 2.
- Turn the crown until the minute hand indicates the exact minute at which you want to set your watch. The small notch on the hand indicates the minute.

For example, in this diagram we want to set the watch at minute 20.



LASTLY_ Push the crown in position 0 and that's it!